


LAND CAPABILITY BOUNDARIES
OUTSIDE OF THE SEZ ARE NOT
SHOWN AT THIS TIME.

50% DESIGN PLANS
NOT FOR CONSTRUCTION

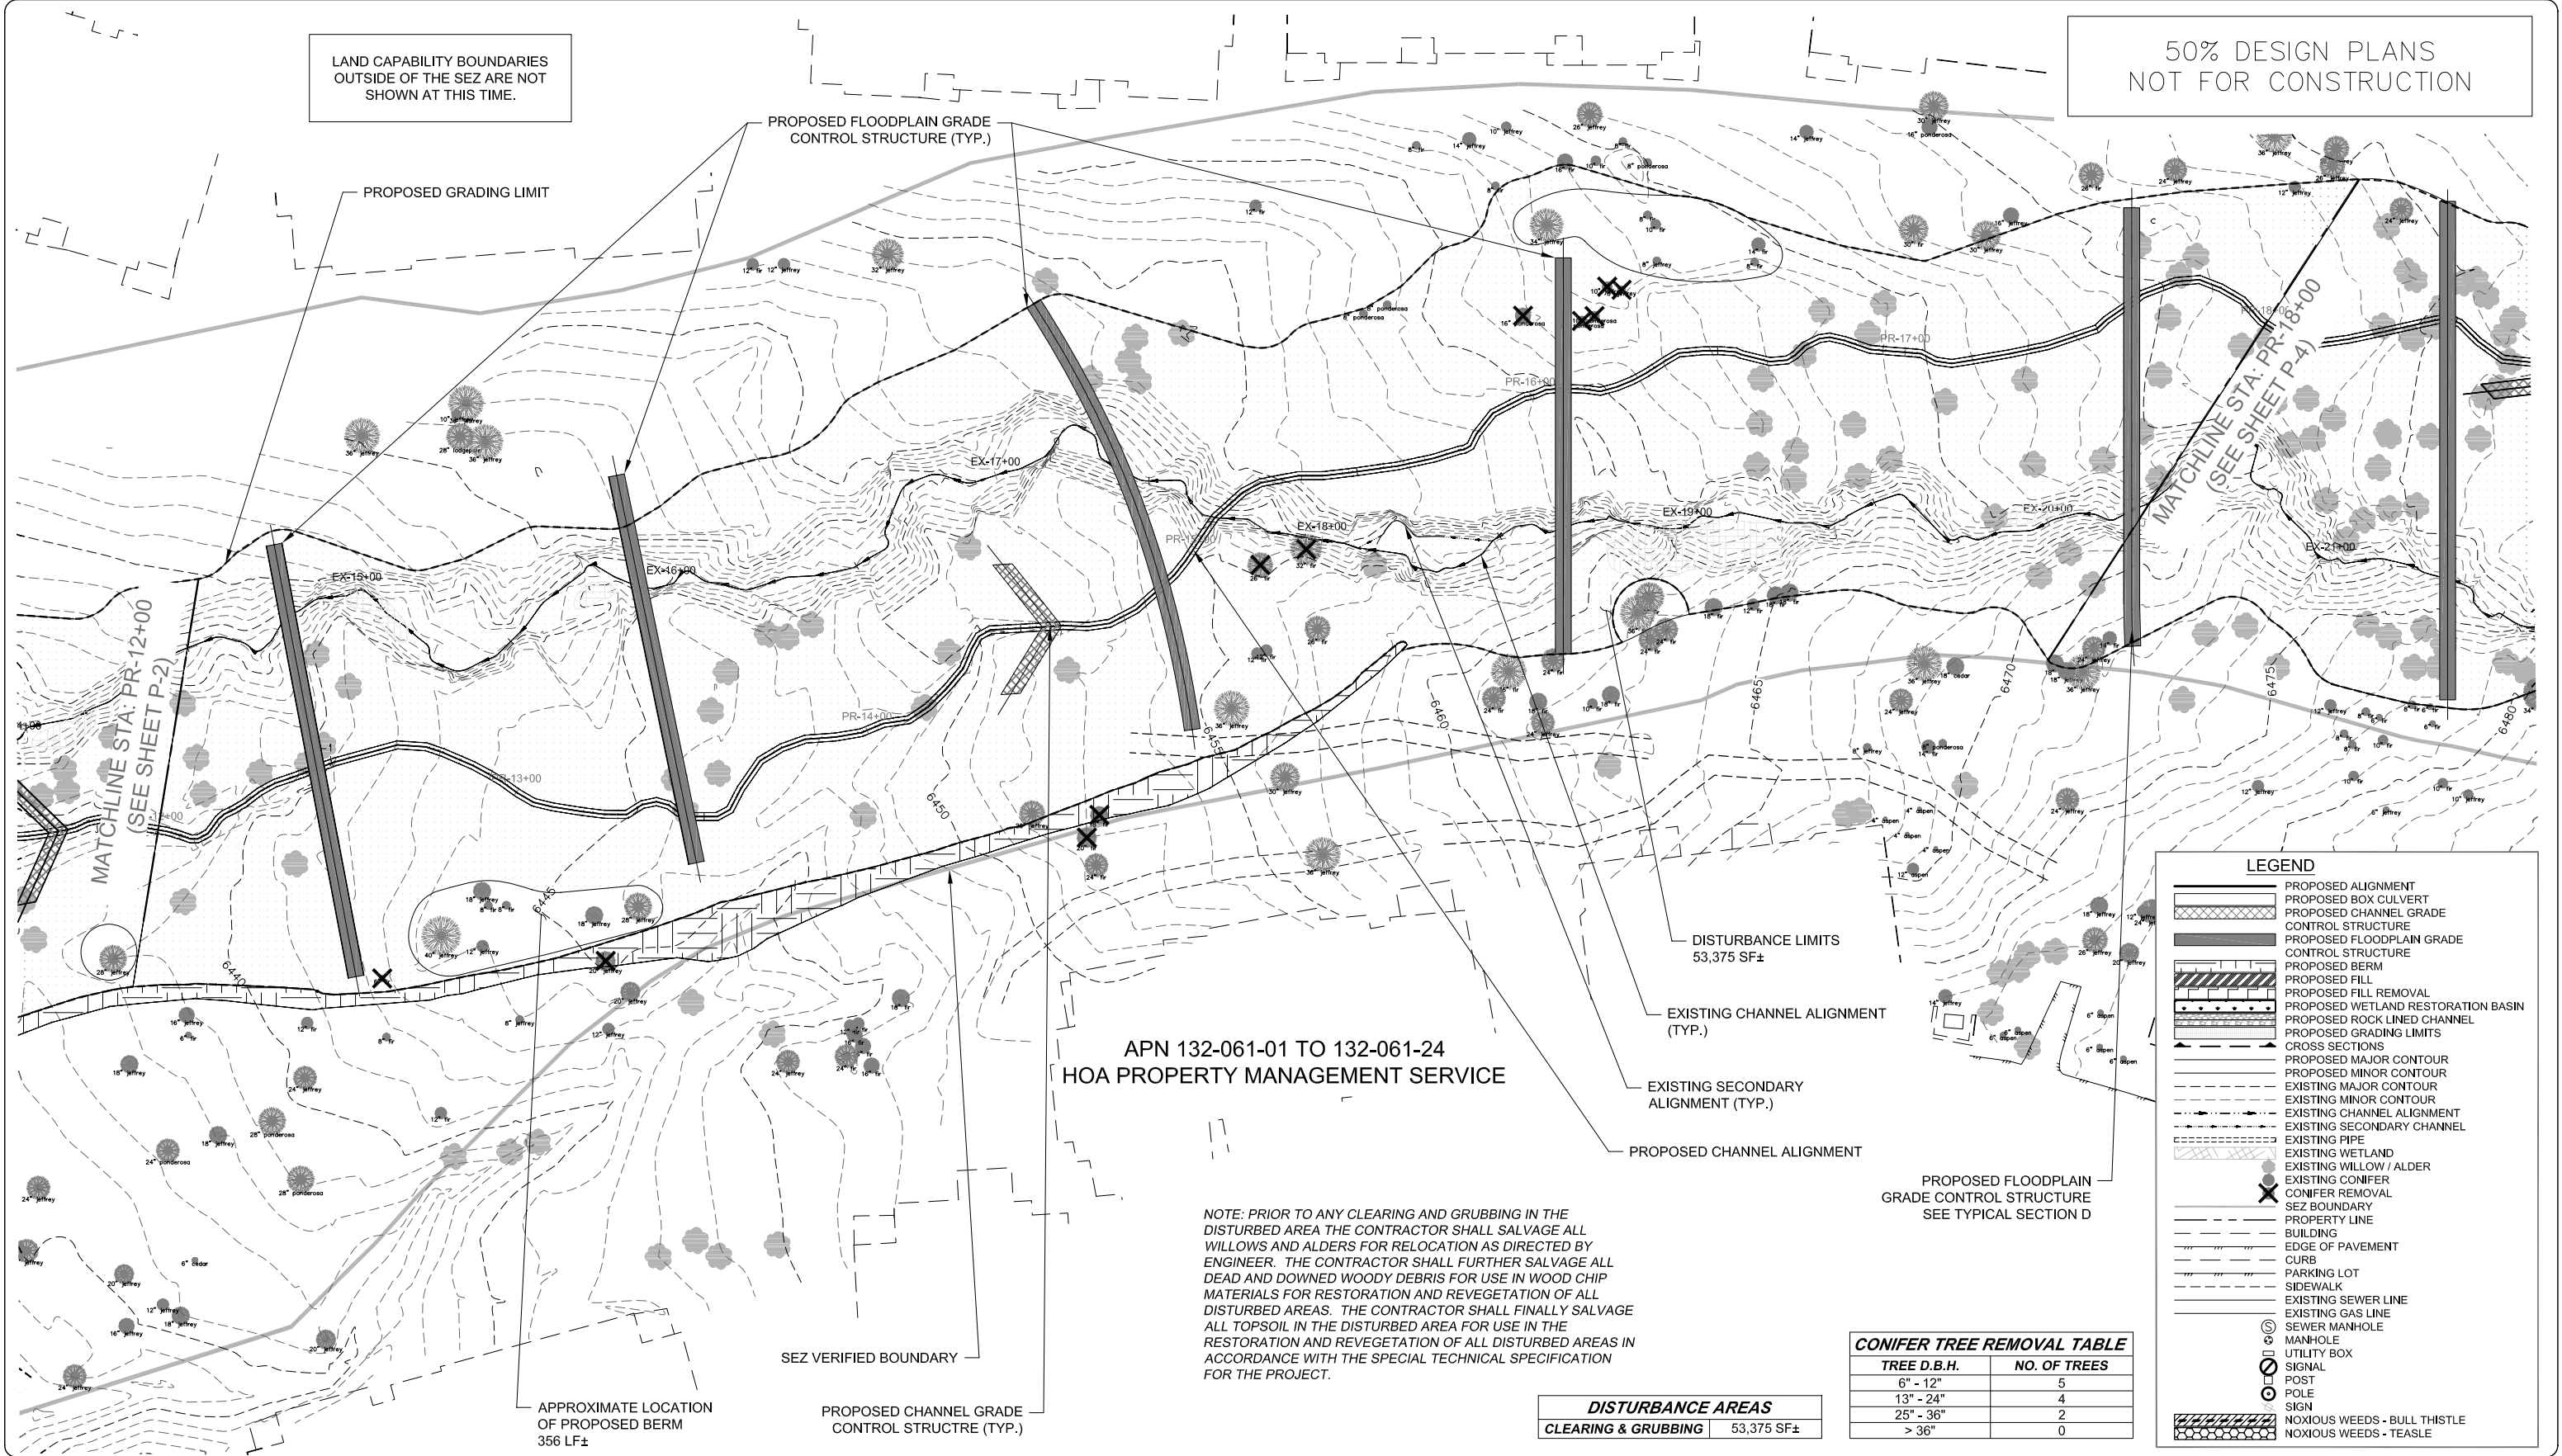


NOTE: PRIOR TO ANY CLEARING AND GRUBBING IN THE DISTURBED AREA THE CONTRACTOR SHALL SALVAGE ALL WILLOWS AND ALDERS FOR RELOCATION AS DIRECTED BY ENGINEER. THE CONTRACTOR SHALL FURTHER SALVAGE ALL DEAD AND DOWNED WOODY DEBRIS FOR USE IN WOOD CHIP MATERIALS FOR RESTORATION AND REVEGETATION OF ALL DISTURBED AREAS. THE CONTRACTOR SHALL FINALLY SALVAGE ALL TOPSOIL IN THE DISTURBED AREA FOR USE IN THE RESTORATION AND REVEGETATION OF ALL DISTURBED AREAS IN ACCORDANCE WITH THE SPECIAL TECHNICAL SPECIFICATION FOR THE PROJECT.

DISTURBANCE AREAS	
CLEARING & GRUBBING	53,375 SF±

CONIFER TREE REMOVAL TABLE	
TREE D.B.H.	NO. OF TREES
6" - 12"	5
13" - 24"	4
25" - 36"	2
> 36"	0

REVISIONS			
1	12/09	CD	REVISIONS BASED ON TAG COMMENTS
MARK	DATE	BY	



MIDDLE ROSEWOOD CREEK
AREA "A" SEZ RESTORATION
PLAN VIEW
STATION: PR-12+00 TO PR-18+00

Sheet
P-3

DATE
December
2009


50% DESIGN PLANS
NOT FOR CONSTRUCTION

NOTE: PRIOR TO ANY CLEARING AND GRUBBING IN THE DISTURBED AREA THE CONTRACTOR SHALL SALVAGE ALL WILLOWS AND ALDERS FOR RELOCATION AS DIRECTED BY ENGINEER. THE CONTRACTOR SHALL FURTHER SALVAGE ALL DEAD AND DOWNED WOODY DEBRIS FOR USE IN WOOD CHIP MATERIALS FOR RESTORATION AND REVEGETATION OF ALL DISTURBED AREAS. THE CONTRACTOR SHALL FINALLY SALVAGE ALL TOPSOIL IN THE DISTURBED AREA FOR USE IN THE RESTORATION AND REVEGETATION OF ALL DISTURBED AREAS IN ACCORDANCE WITH THE SPECIAL TECHNICAL SPECIFICATION FOR THE PROJECT.


DISTURBANCE AREAS	
CLEARING & GRUBBING	12,500 SF±
FILL REMOVAL	5,300 SF±

CONIFER TREE REMOVAL TABLE	
TREE D.B.H.	NO. OF TREES
6" - 12"	5
13" - 24"	2
25" - 36"	1
> 36"	0

LEGEND	
	PROPOSED ALIGNMENT
	PROPOSED BOX CULVERT
	PROPOSED CHANNEL GRADE CONTROL STRUCTURE
	PROPOSED FLOODPLAIN GRADE CONTROL STRUCTURE
	PROPOSED BERM
	PROPOSED FILL
	PROPOSED FILL REMOVAL
	PROPOSED WETLAND RESTORATION BASIN
	PROPOSED ROCK LINED CHANNEL
	PROPOSED GRADING LIMITS
	CROSS SECTIONS
	PROPOSED MAJOR CONTOUR
	PROPOSED MINOR CONTOUR
	EXISTING MAJOR CONTOUR
	EXISTING MINOR CONTOUR
	EXISTING CHANNEL ALIGNMENT
	EXISTING SECONDARY CHANNEL
	EXISTING PIPE
	EXISTING WETLAND
	EXISTING WILLOW / ALDER
	EXISTING CONIFER
	CONIFER REMOVAL
	SEZ BOUNDARY
	PROPERTY LINE
	BUILDING
	EDGE OF PAVEMENT
	CURB
	PARKING LOT
	SIDEWALK
	EXISTING SEWER LINE
	EXISTING GAS LINE
	SEWER MANHOLE
	MANHOLE
	UTILITY BOX
	SIGNAL
	POST
	POLE
	SIGN
	NOXIOUS WEEDS - BULL THISTLE
	NOXIOUS WEEDS - TEASLE

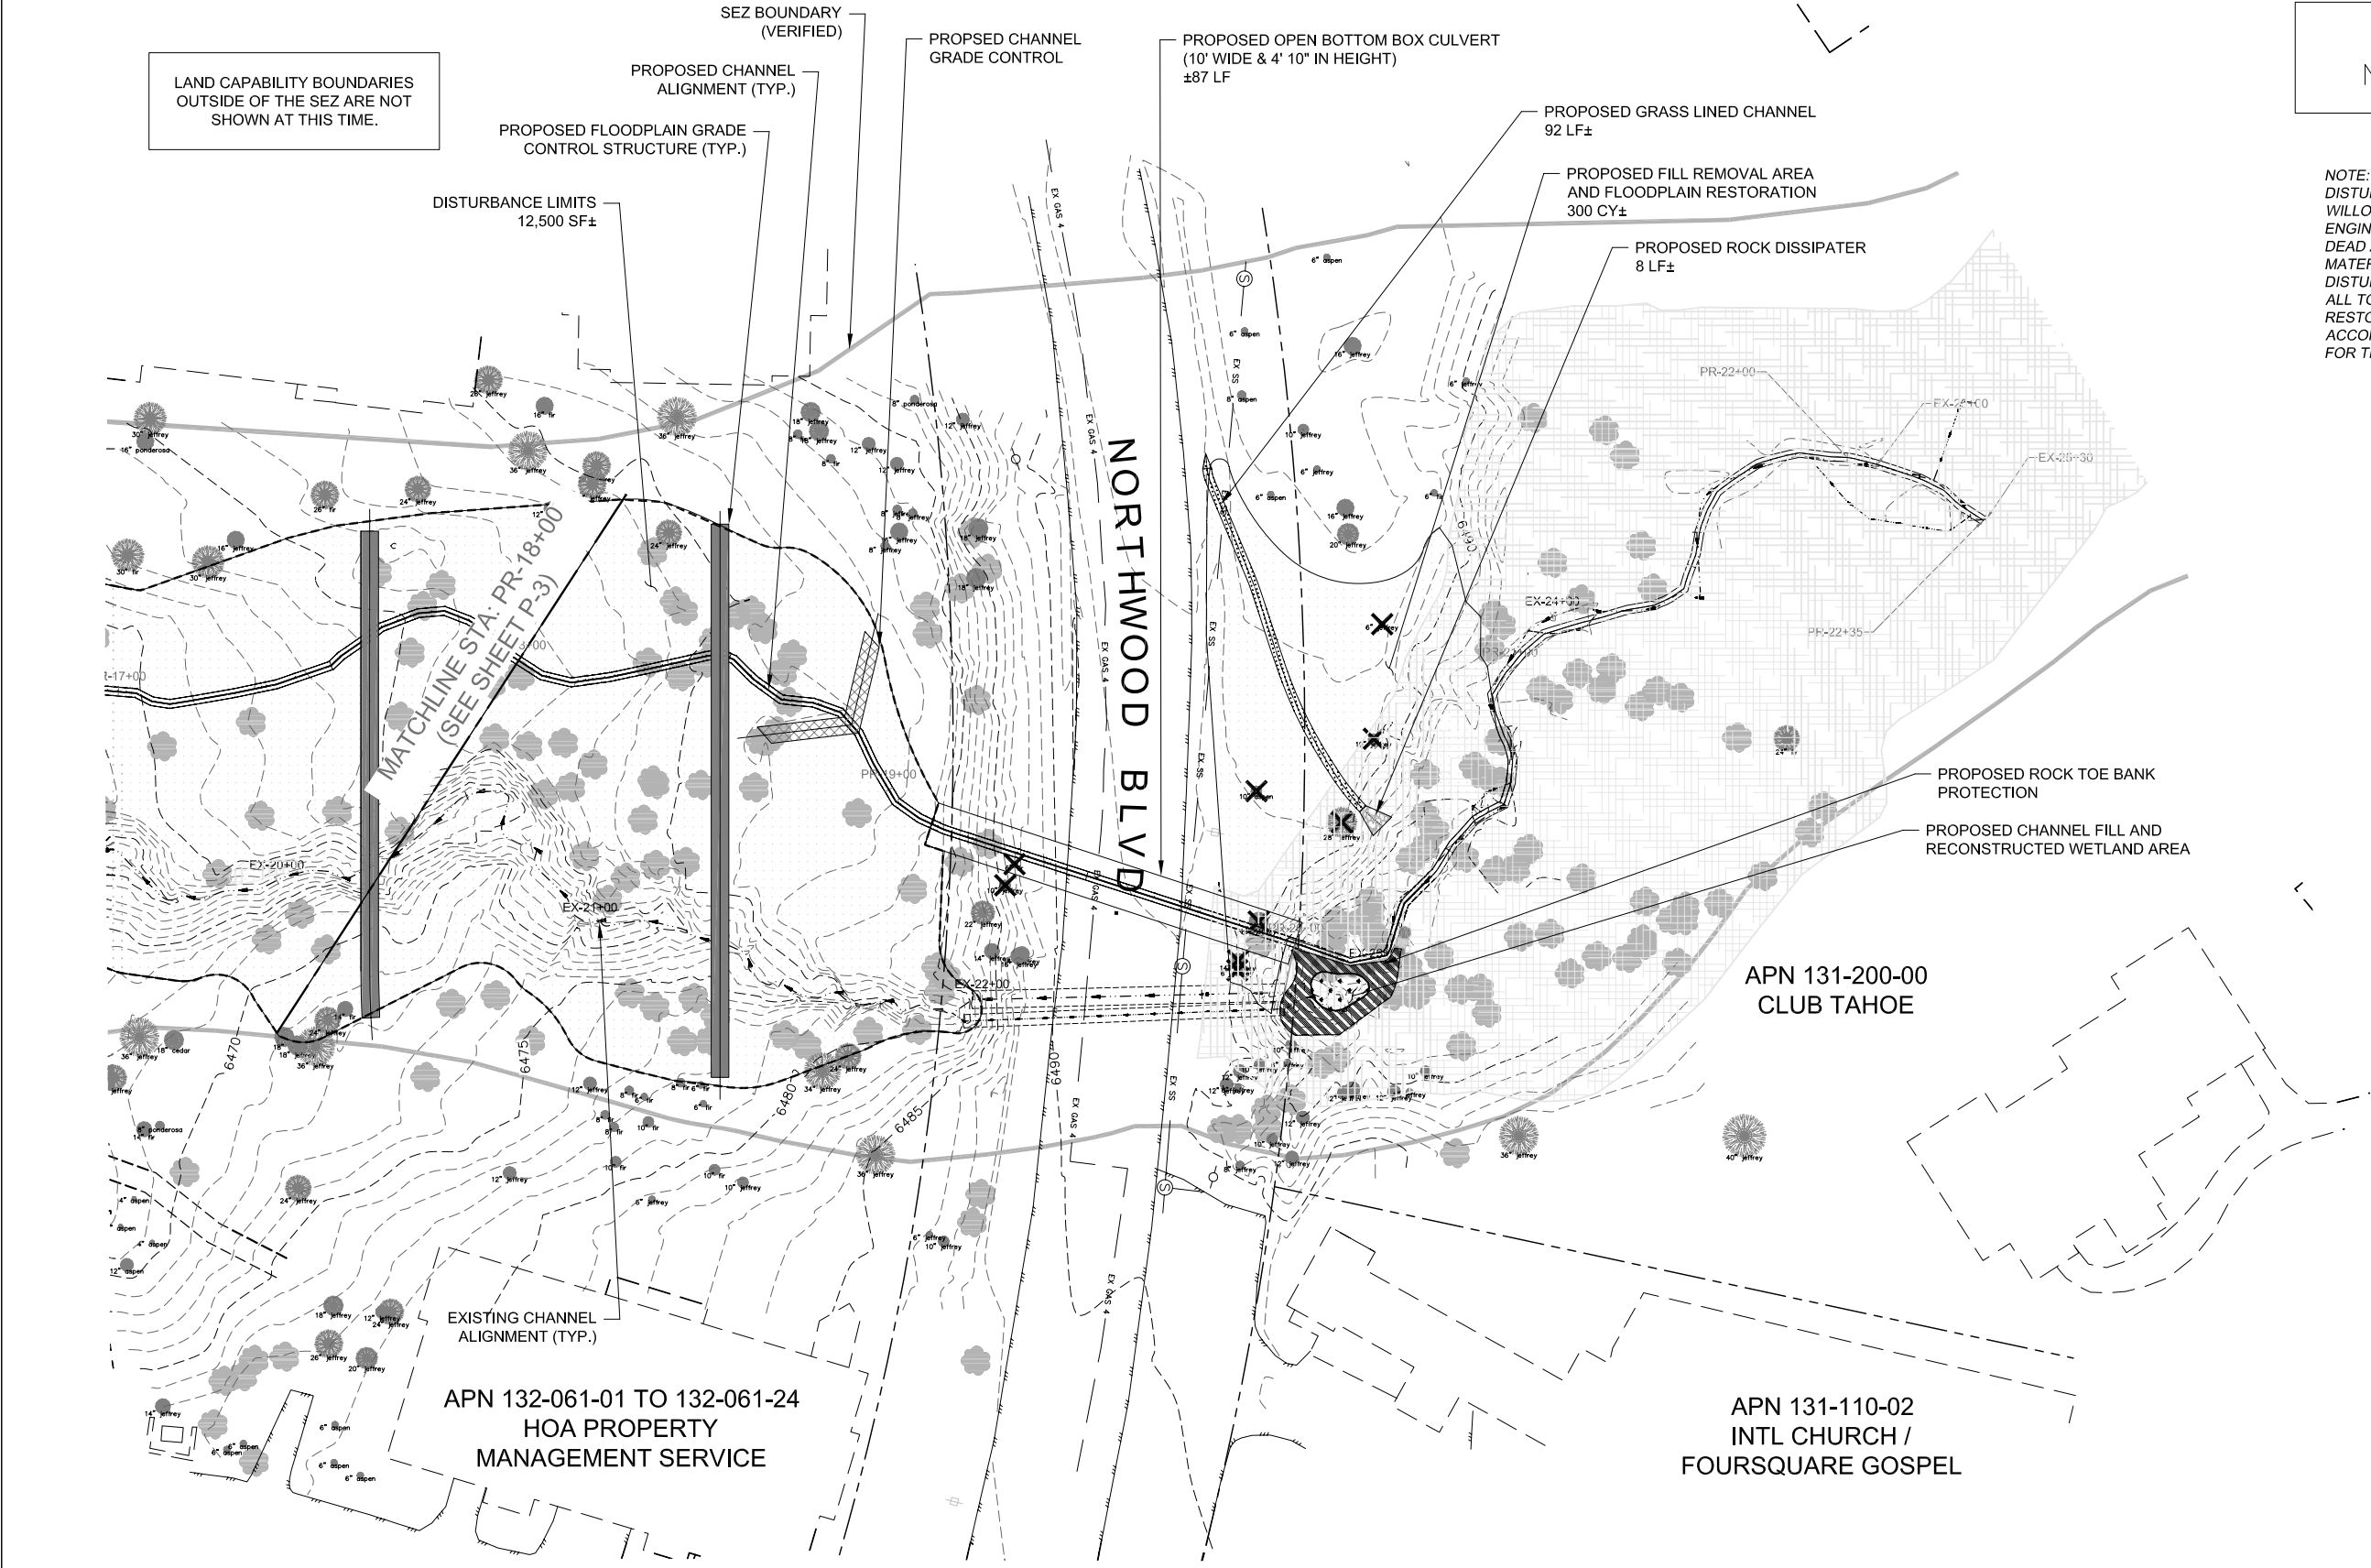

REVISIONS			
1	12/09	CD	REVISIONS BASED ON TAG COMMENTS
MARK	DATE	BY	



MIDDLE ROSEWOOD CREEK
AREA "A" SEZ RESTORATION
PLAN VIEW
STATION: PR-18+00 TO PR-22+35

Sheet
P-4

DATE
December
2009