


Proposed Dam Modifications

Proposed Modifications to the Dam Face Include:

- •Excavation of the crest and existing downstream embankment.
- Construct a downstream shear key.
- Install a downstream rock filter and drain.
- Install a stability berm over the shear key and downstream slope of dam.
- •Raise the dam crest by ~7 feet.
- •Construct a new two-lane road across the dam.

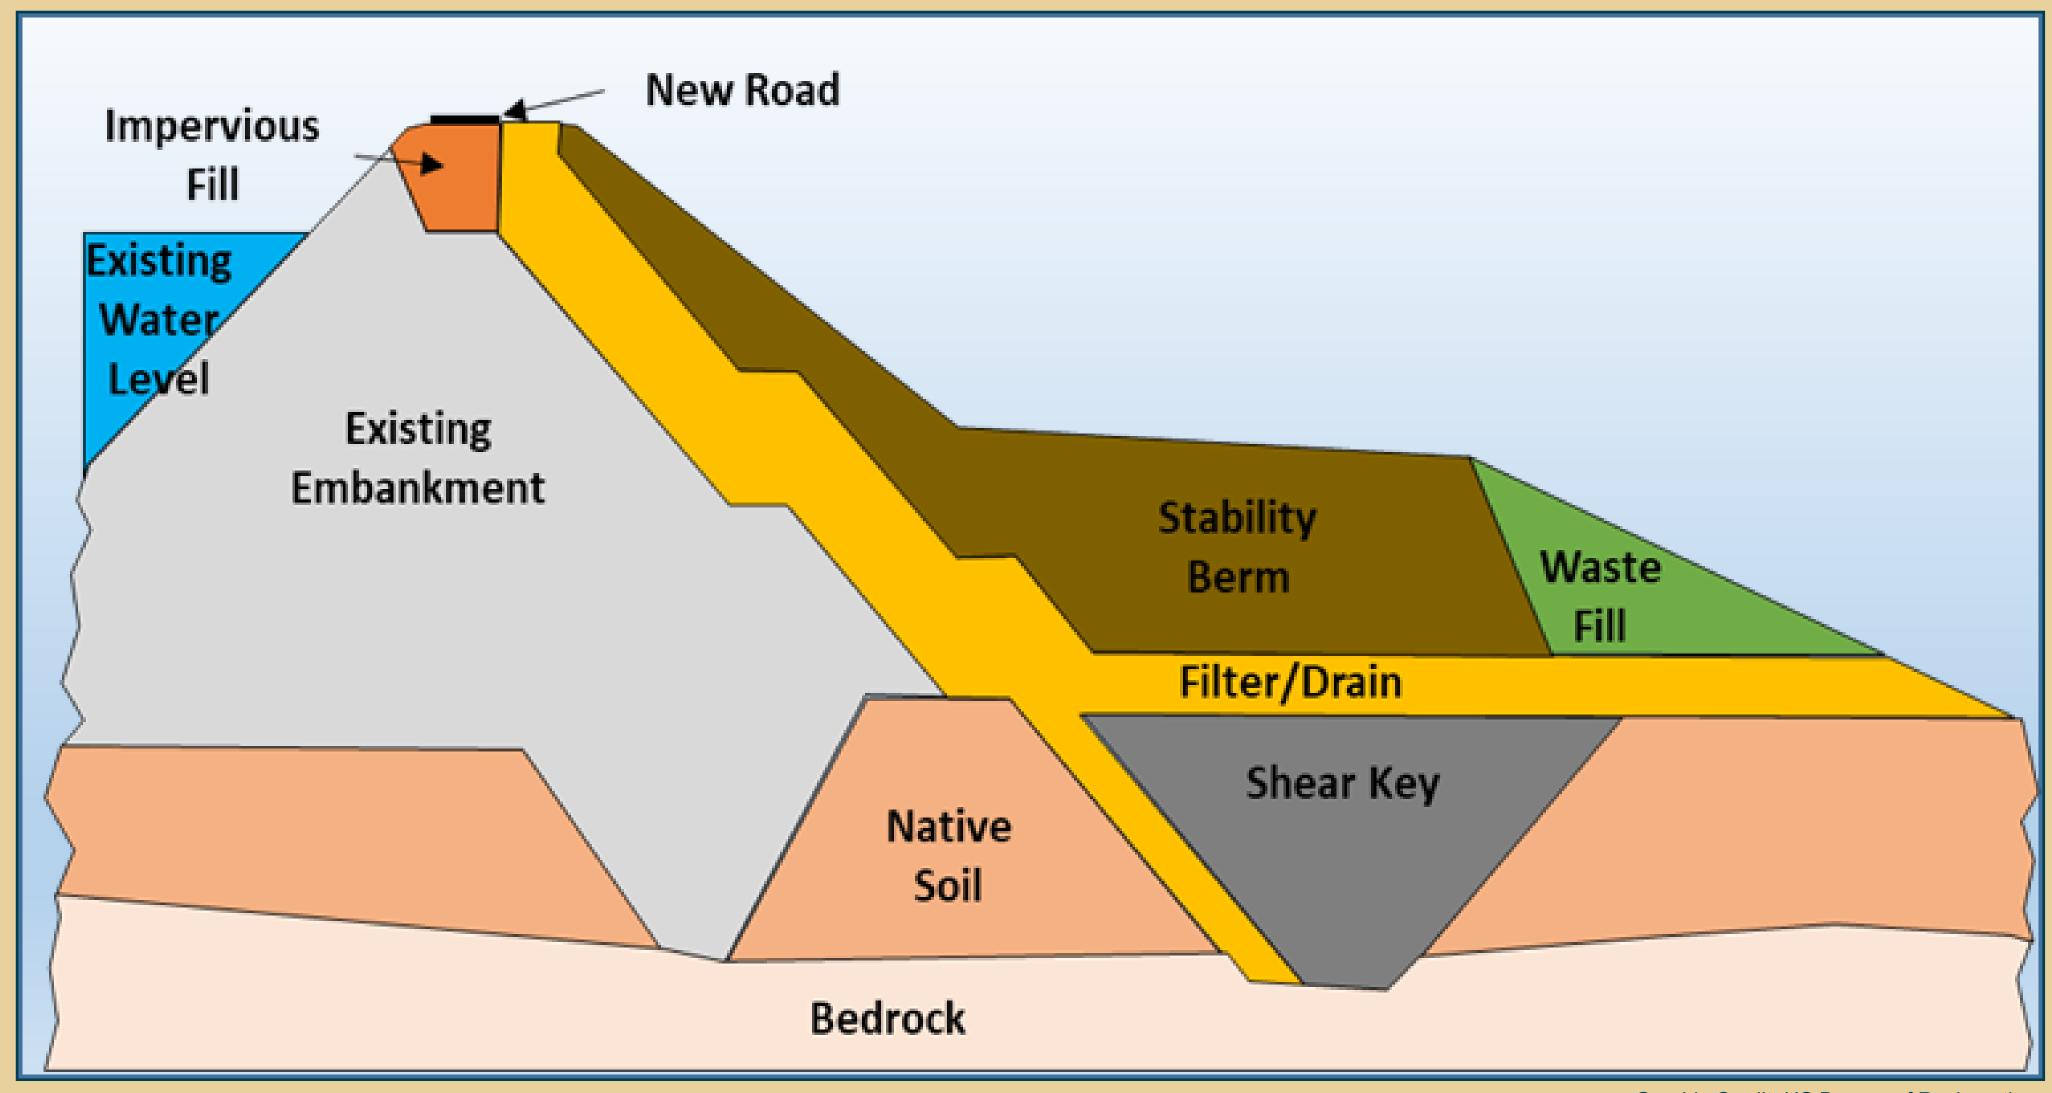

Graphic Credit: US Bureau of Reclamation