

# RECLAMATION

*Managing Water in the West*

## Flow Measurement with Long-Throated Flumes under Uncertain Submergence

Yuma Project, Arizona  
Lower Colorado Region



U.S. Department of the Interior  
Bureau of Reclamation  
Yuma Area Office  
Yuma, AZ

May 2009

## **Mission Statements**

The mission of the Department of the Interior is to protect and provide access to our Nation's natural and cultural heritage and honor our trust responsibilities to Indian Tribes and our commitments to island communities.

The mission of the Bureau of Reclamation is to manage, develop, and protect water and related resources in an environmentally and economically sound manner in the interest of the American public.

# Flow Measurement with Long-Throated Flumes under Uncertain Submergence

Yuma Project, Arizona  
Lower Colorado Region

*prepared by*

**Author:**

Tom Gill, Hydraulic Engineer

U.S. Department of the Interior, Bureau of Reclamation Hydraulic Investigations and Laboratory Services

**Co-Author:**

Mark Niblack, Agriculture Engineer

U.S. Department of the Interior, Bureau of Reclamation, Yuma Area Office Water Conservation Field Services Coordinator



U.S. Department of the Interior  
Bureau of Reclamation  
Yuma Area Office  
Yuma, AZ

May 2009

# Contents

	Page
Abstract.....	1
Introduction and Background .....	2
Laboratory Tests .....	3
Field Tests.....	5
University of Arizona Valley Farm Site .....	5
YCWUA Sites.....	8
Field Results.....	10
Summary .....	12
References.....	14

## Abstract

The evolving circumstances under which irrigation districts operate include growing demands for more accurate knowledge and accountability of flow throughout the conveyance network, along with increased needs for timely awareness when unexpected flow conditions are present. For open channel conveyance systems, critical-flow structures (flumes or weirs) offer the simplicity of a direct correlation between upstream water level and a corresponding discharge. Unfortunately, at many locations where flow measurement is desired there may be insufficient head available for operation of a critical-flow measurement structure under all flow conditions that may occur.

In recent years following development of computer-based design and calibration software, long-throated flumes have gained increasing popularity as the class of critical-flow structures which offer the greatest submergence tolerance. Numerous long-throated flumes have been installed at sites where head availability is marginal. In some cases after a flume has been installed it becomes apparent that the head is not sufficient under all operating conditions for critical-flow measurement. Reclamation's Hydraulic Investigations and Laboratory Services Group in Denver, Colorado, and Yuma Area Office Water Conservation Field Services Program in Yuma, Arizona, are field testing a system for measuring flow with long-throated flumes under submerged or unsubmerged conditions.

The initial scope of this field study targeted sites that were specifically selected for continuously submerged conditions. The project scope has been expanded to include occasionally submerged sites in recognition that many long-throated flumes have been installed at sites where submergence conditions that exceed the modular limit exist under some operating conditions. The methodology which is being refined through field testing was initially configured to utilize electronic level sensing and on-site algorithms to first identify the degree of submergence, then select the appropriate (critical-flow rating or venturi solution) discharge calculation method. At each site in the test program, values for measured discharge and other parameters of interest are available via an on-site display. Information from one cooperating district's sites is also fed into the district's SCADA system while another cooperator is set up to poll field sites using a base unit linked to an office PC. Data may also be logged on-site in the programmable control units.

The system being developed is seen as a means of enhancing the utility of existing long-throated flumes at sites where submergence is excessive or uncertain. It also represents a flow measurement option with an analytical solution for sites unsuitable for critical-flow structures due to limited head. As such, it represents

an alternative to other more labor-intensive technologies for lower head-loss, open channel measurement such as acoustic Doppler or radar velocity meters which must be periodically indexed by several independent velocity measurements. The system has been developed to enable two-way real-time communication with remote locations for functionality in a SCADA system.

## Introduction and Background

Engineers at the U.S. Department of the Interior's Bureau of Reclamation (Reclamation) Hydraulic Investigations and Laboratory Group have recently been expanding on the work of others (Replogle, 1994) in low-cost pipe venturi flow measurement by applying the venturi solution for measuring flow at submerged flumes. For the pipe venturi solution, the measured static head differential along with known cross sectional flow areas from two locations – the venturi approach section and the constricted throat section – are needed to determine discharge rate by simultaneously solving relationships for conservation of energy and conservation of mass.

### Equation 1.

$$Q = C_d * \frac{A_1 * A_T}{(A_1^2 - A_T^2)^{0.5}} * \left( \frac{2g}{\alpha} * (H_1 - H_T) \right)^{0.5}$$

Where:

$Q$  = Discharge (cfs)

$C_d$  = Discharge coefficient – determined empirically

$A_1$  = Cross section flow in the meter approach section (ft<sup>2</sup>)

$A_T$  = Cross section flow area in the constricted throat section of meter (ft<sup>2</sup>)

$g$  = Gravitational Acceleration (= 32.2 ft/s<sup>2</sup>)

$\alpha$  = Velocity distribution coefficient (a value of 1.02 is commonly used)

$H_1$  = Approach section static head (ft)

$H_T$  = Throat section static head (ft)

*Center line of meter must be horizontal*

*$H_1$  and  $H_T$  measured from a common datum*

For application of this solution to an open channel structure, both the approach section and a constricted throat section must be prismatic in shape for a sufficient distance to ensure parallel flow lines past the static head measurement point of each section. This requirement is consistent with geometric requirements for a critical-flow long-throated flume. The critical-flow long-throated flume calibration procedure also functions by simultaneous solution for conservation of energy and conservation of mass. Long-throated flume calibration utilizes an

iterative process, whereby an appropriate approach section level is converged upon that corresponds with the unique critical depth at the throat for a given discharge.

Notable factors in comparing application of the venturi solution to a pipe meter with using the venturi solution on a long-throated flume are the magnitude of head differential observed as flow moves from the approach section, then is accelerated through the constricted throat sections. Pipe meters may be designed to provide a significant head differential (ranging from a few tenths of a foot to multiple feet) over the desired measurement range that enables a comparatively high degree of resolution in determining flow rates, yet impose comparatively small head loss on the system.

In contrast, the magnitude of head differential seen for long-throated flumes would typically be considerably smaller than the head differential seen using a pipe meter. For example, in a field data set discussed below measured differential at a submerged flume over a 6 hour period ranged from 0.021 ft. to 0.11 ft while corresponding submergence rates varied from 98.8% to 93.0% respectively. With the smaller ranges of head differential available, precision in measuring water levels is an important factor in obtaining flow measurements of desired accuracy with a flume using the venturi solution.

## Laboratory Tests

Limited-scope laboratory tests were performed at Reclamation's hydraulics laboratory in Denver, Colorado, in 2003 and 2004. Both test series utilized a laboratory model in which a laterally contracted flume was installed at mid reach of a trapezoidal channel. A ramp-type long-throated flume was installed at the downstream end of the channel. The ramp flume served both to force submergence on the laterally-contracted flume and also functioned for obtaining control flow measurements against which to compare flow calculations from the submerged flume. Figure 1 is a photo of the laboratory test channel looking downstream.



Figure 1. Laboratory Test Facility

During the 2003 testing, all water level measurements were made using a single stilling well equipped with a hook-type point gage capable of least readings of 0.001 ft. This well was connected by a valved manifold to each tap location on the test channel where water level measurements were needed. In the testing procedure, each time the stilling well was connected to a different tap, level readings were repeated at 5 minute intervals until consecutive readings were unchanged, indicating the stilling well had reached equilibrium level with static pressure at the tap.

Results from the 2003 tests showed a promising level of agreement between flow rates determined by the ramp flume and the submerged flume. But the single stilling well water level measuring system that had been employed did not appear to be practical for field applications. During the laboratory tests, it had required as long as 30 minutes to confirm the stilling well was in equilibrium with static pressure at a tap. Given that water levels representing static head at two taps must be determined to apply the venturi discharge equation, a means of more rapidly determining water levels with a suitable degree of accuracy would be imperative in moving this measurement technology into field tests.

Laboratory testing in 2004 focused on identifying a means of obtaining water level measurements in a timely manner that could translate into practical field application for the technology. For the 2004 tests, stilling wells were installed at each channel tap. A bubbler sensor was utilized to electronically sense water levels. In order to minimize variability that use of multiple sensors would introduce, a single bubbler unit was used to read all taps by physically connecting and disconnecting an air line from the bubbler apparatus to taps in the various stilling wells. Using a bubbler sensor in this manner, the time required to obtain water level measurements needed for application of the venturi discharge equation was reduced to no more than a few minutes. The potential for further simplifying reading multiple water levels with a bubbler sensor by adding a solenoid valve controlled manifold to the bubbler output line was readily evident.

An additional feature of the 2004 test set up was the piping configuration of the stilling wells. Tubing was installed linking adjacent stilling wells. Valves were installed in the line between each stilling well and channel tap. This plumbing arrangement enabled all stilling wells to be isolated from the laboratory channel and to be observed with a common level at all wells. This configuration greatly simplified initial calibrations and subsequent calibration checks in assuring that sensor offset values for the respective taps reflect a common datum to the accuracy limits of the bubbler sensor. Results from the 2004 testing again showed a promising level of agreement between discharge computed for the submerged flume and discharge determined at the ramp-type long-throated flume. Figure 2 is a plot of the 2004 tests.

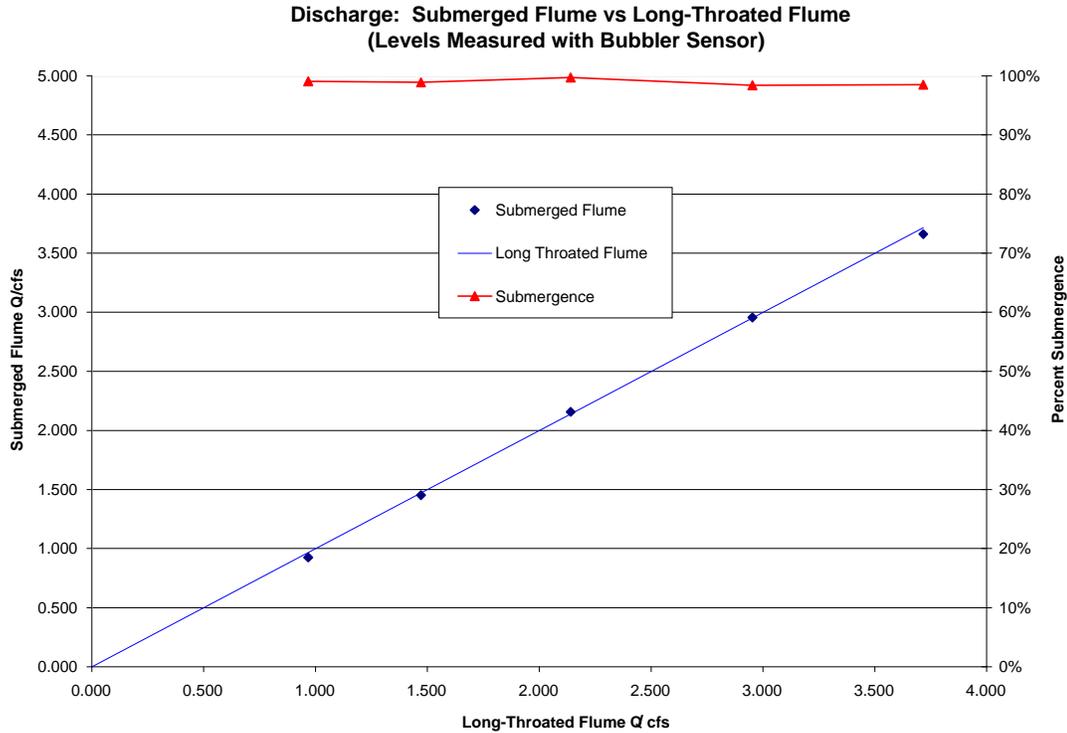


Figure 2. Comparative discharge calculations from 2004 laboratory tests

## Field Tests

### University of Arizona Valley Farm Site

An initial submerged flume field site was installed in early 2007 at the University of Arizona Valley Farm in Yuma, Arizona, in a cooperative effort including the University of Arizona Extension Service, Reclamation’s Yuma Area Office Water Conservation and Field Services Program (YAO), and Reclamation’s Hydraulic Investigations and Laboratory services group. This site is located approximately 30 feet downstream from a location where flow exits a pipeline into a concrete-lined channel. No measurement structure was previously in place at this site. Figure 3 shows freshly placed concrete that forms a laterally contracted flume at the University of Arizona Valley Farm site.

As a result of a leaking gate at the head of the upstream pipe section, this site is constantly subjected to standing water at times of no discharge. Earthen berms shown in Figure 3 were necessary to isolate the flume during construction from this standing water. The standing water, coupled with nearly flat canal slope,

creates excessive submergence conditions for operation of a critical-flow flume at this location.



**Figure 3. University of Arizona Valley Farm submerged flume site**

Two large vertical pipes seen at the right of the freshly placed concrete flume are stilling wells. Three smaller vertical pipes are access-ways to valves in each line between the canal and respective stilling well and a line between the two stilling wells. Two float & pulley level sensors were installed for water level measurement at this site. At the time of installation, a bubbler sensor configuration capable of automatically reading multiple taps was under development at Reclamation's hydraulics laboratory but was not yet available for use at this site. A programmable logic controller (PLC) calculates water levels from sensor inputs and calculates discharge rate on three-minute cycles. Calculated values are shown on an LED Display.

Discharges of approximately 5 cfs and 10 cfs as measured using the venturi solution at this site were compared with stream-gated values using a Price AA meter and found to be within 10% agreement. Based on initial observations at the University of Arizona Valley Farm site, YAO inquired about application of the venturi discharge solution at existing long-throated flumes that had been designed assuming critical-flow operation, but which at times are subjected to submergence that exceeds modular limits. Following these conversations, contacts were made


with both the Unit B Irrigation and Drainage District (Unit B) and the Yuma County Water Users Association (YCWUA). Plans for three additional field sites, one at Unit B, and two at YCWUA emerged from these contacts.

Unit B Irrigation and

Drainage District Site: At the Unit B District, a site was selected where no measurement structure had previously existed. The site is the head of a concrete-lined lateral with limited head availability. When water is conveyed in the lateral, a discharge rate of 10 cfs is the consistently targeted delivery rate. Submergence conditions at this flume, seen in Figure 4, are expected to exceed modular limits during water deliveries.



**Figure 4. Unit B District Flume**

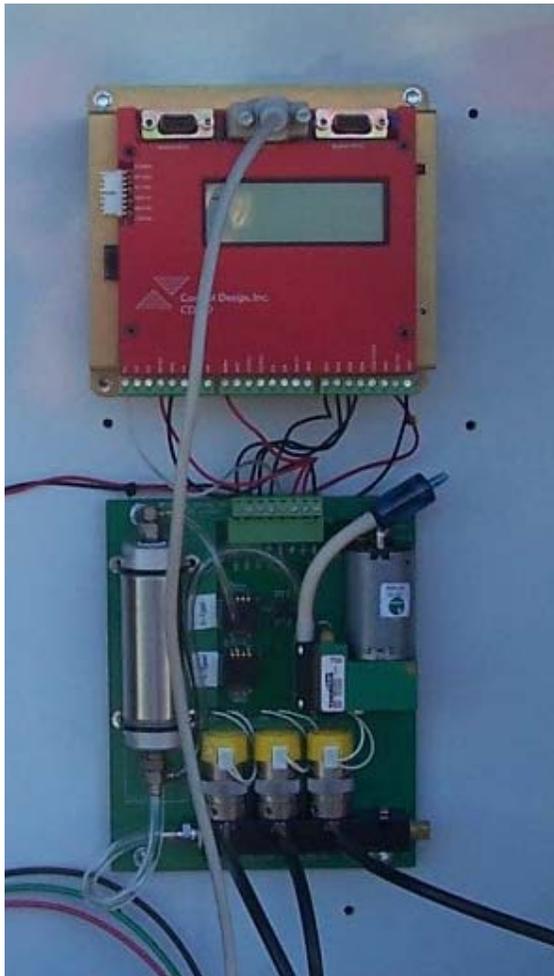

**Figure 5. Radio/Control unit & Bubbler w/ Solenoid Valve Bank**

A laterally-contracted “insert” flume pre-constructed of plastic lumber by YAO was installed at the Unit B site in November 2007. A PLC with integral data communications radio was installed along with a bubbler sensor. At the time of this installation, a prototype bubbler sensor with a solenoid valve bank capable of reading multiple water levels had been configured and tested at Reclamation’s laboratory. A bubbler sensor unit with solenoid valve bank is seen at left in Figure 5 linked to a radio/control unit.

A concept employed for the Unit B and YCWUA field sites was to include measurement of actual submergence rate. To measure submergence the bubbler sensor was equipped with three solenoid valves to measure water levels in the upstream, throat and downstream

sections of each flume.

Upstream and downstream levels are needed to determine submergence, while upstream and throat levels are needed for the venturi solution.

## YCWUA Sites

Two YCWUA sites were selected where existing long-throated flumes operate at times at submergence rates that exceed modular limits for critical-flow operation. At the head of YCWUA's Potter lateral, the district has recently installed a ramp-type long-throated flume. At the head of YCWUA's Cumming lateral, the district had recently installed a long-throated flume featuring both lateral contraction and a ramp in the flume invert. Submerged flow instrumentation was installed at the flumes on each of these laterals in November of 2007. Figure 6 and Figure 7 are photos of the Potter and Cumming sites respectively (both views looking downstream).



**Figure 6. YCWUA Potter Flume**



**Figure 7. YCWUA Cumming Flume**

In an effort to reduce cost of installation, the Unit B site and both YCWUA sites were initially set up without stilling wells. Bubbler lines were attached to the flume walls underneath PVC arc sections made by splitting a six-inch PVC pipe longitudinally into approximately four-inch wide strips. The bubbler tap itself was created by gluing a 90 degree, 1/8" tubing hose barb fitting into a hold in the PVC arc shield, then cutting the fitting flush with the outer surface of the shield. The green PVC arc shields may be seen installed on the left side of the channel at the Potter flume in Figure 6 and the right side of the Cumming flume in Figure 7.

While installing bubbler lines on the flume walls made for a simple installation, establishing a common datum among bubbler taps with any degree of precision was a greater challenge than was the case for the University of Arizona Valley Farm site with stilling wells linked by valved lines. Four months after the installations at the Unit B flume and the YCWUA Cumming and Potter sites,

linked stilling wells were installed at each of the three flumes with upstream, throat and downstream taps, and the surface-mounted bubbler lines were removed.

With the linked stilling wells installed, sensor calibrations were performed at the Unit B and both YCWUA sites with accurate identification of a common datum. YAO staff suggested an effective means of creating a comprehensive data record for verifying performance of the venturi solution would be to install an acoustic-doppler flow meter adjacent to the field test flumes to enable time series logging of flow measurements. YAO had two MGD Technologies Acoustic Doppler Flow Meter (ADFM) units available for temporary use. In an evaluation of the MGD ADFM technology that had been previously conducted at the Reclamation Laboratory, (Vermeyen, 2000), a similar unit was tested with discharge varying from approximately 12 cfs to 30 cfs. In these tests, the ADFM produced discharge measurements that showed a maximum variance of 11.8% compared with the laboratory control measurements.

The two YCWUA sites were determined to be the preferred locations for installing the available ADFM units given the varied range of submergence that is experienced at each of these sites, and in consideration of the fact that flow is rarely shut off in the Cumming and Potter laterals. In contrast, flow is present only occasionally at the Unit B and University of Arizona Valley Farm sites. An output signal from the ADFM unit output would be fed into the on-site PLC unit. Information logged on the PLC included submergence, discharge using the venturi solution, discharge using the flume rating and upstream level, discharge calculated by the ADFM, and a time stamp.

For the ADFM installation at the YCWUA Potter site, a wide flange steel beam was placed approximately 30 feet upstream from the flume. An electrical enclosure with a solar panel attached to the enclosure lid was installed on the beam to house the ADFM control unit and batteries. The ADFM transducer was mounted on a steel plate to which a steel tube was welded such that the tube could be clamped to the wide flange beam to anchor the ADFM transducer to the canal invert. Figure 8 is a photo of the ADFM placement at the YCWUA Potter site.

For the Cumming site, a bridge of plastic lumber was constructed over the flume approach section. Similar to the Potter installation, the ADFM transducer is attached to a steel plate attached at an orientation normal to a pipe. The pipe is clamped to the bridge to secure the ADFM transducer to the structure invert. The instrument enclosure and solar panel are positioned along side the flume as may be seen in Figure 9.



Figure 8. ADFM unit at Potter Flume



Figure 9. ADFM unit at Cumming Flume

## Field Results

Effectiveness of using the venturi flow calculation method with long-throated flumes under submerged or unsubmerged conditions is shown in the following 24 hour time series plots including periods of differing submergence conditions. Figure 10 is a plot of flow at the YCWUA Cumming flume for the 24 hour period of February 15, 2009. Data collected included flume submergence and flow as calculated by: 1) critical-flow flume rating based on upstream level, 2) venturi flow calculated using upstream and throat levels, and 3) flow calculated by the upstream acoustic doppler ADFM device.


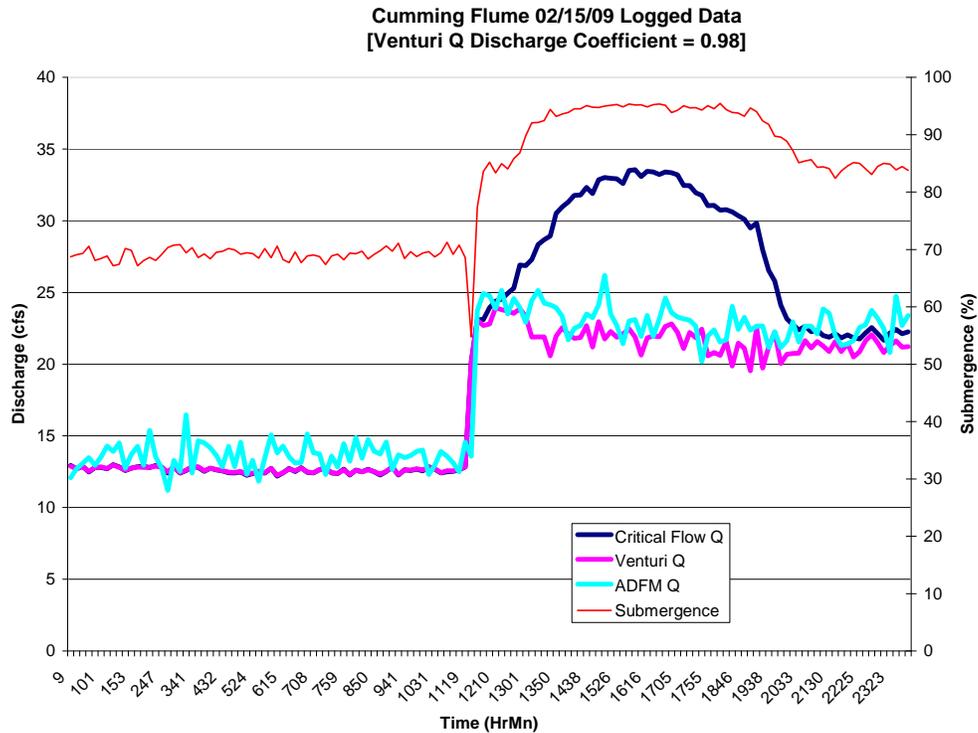


Figure 10 represents operation on a day where discharge was adjusted at mid-day from about 13 cfs to around 55 cfs. At the lower flow, measured submergence was in the range of 70%, well below the modular limit for the flume. Hence flow calculated using the flume rating and upstream level would be valid. The plot suggests that at a submergence rate between 80% and 85%, modular limit for the flume was exceeded, and flow calculated using upstream level and the flume rating began to yield excessively high values.

Interestingly, at submergence rates below the modular limit, flows calculated using the upstream level and the flume rating are virtually identical to flow calculated using the venturi solution based on both upstream and throat levels. At submergence rates in excess of the modular limit, the relation between discharges using the venturi solution maintains a similar relationship to the ADFM calculated discharge that is seen at lower submergence.

Figure 11 is a plot of data from the YCWUA Potter flume for the 24 hour period of April 4, 2009. During the field testing, the Potter was observed to rarely operate under excessive submergence. For the data plotted below, the nearest downstream check was operated to deliberately create a high submergence rate which was incrementally reduced in approximately 30-minute time steps over approximately a 6-hour period.

Potter Flume 04/04/09 Logged Data  
(Venturi Q Discharge Coefficient = 0.98)

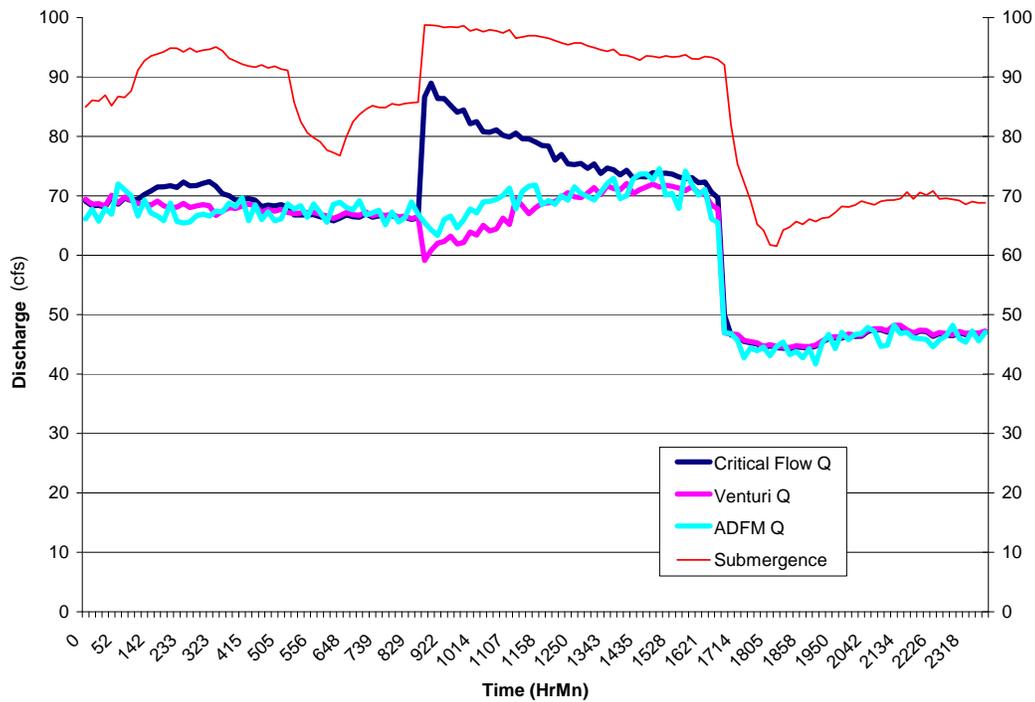

**Figure 11. Plot of Discharge under Varied Submergence at Potter Flume**

The plot of data from 04/04/09 at the Potter flume suggests that the modular limit of the ramp-type flume at Potter is around 90% submergence compared with the 80% to 85% submergence modular limit suggested by data from the Cumming flume which is laterally contracted along with having a modest height raised crest. Much like the Cumming flume data of Figure 10, at submergence levels below the modular limit, flow calculated using upstream level with the flume rating and flow calculated using the venturi solution are virtually identical. At submergence rates in excess of the modular limit, discharge measured using upstream level with the flume rating is excessively high while the venturi solution discharge tracks much closer to the upstream ADFM unit.

## Summary

What was initiated in laboratory studies as a means of measuring flow under submergence rates that constantly exceed modular limits of a long-throated flume has been adapted in field trials to examine viability of using the venturi flow

measurement solution under either submerged or unsubmerged conditions. In laboratory tests the venturi measurement system has been shown to be a viable means of obtaining measurements of reliable accuracy under submergence rates in excess of flume modular limit, given a means of precisely measuring water levels in the approach and throat sections of a long-throated flume.

In field testing, the concept was expanded to look at developing a system for measuring flow at long-throated flumes that may or may not be submerged. The initial concept applied in the field tests was to first measure submergence, then utilize the flume rating and approach section water level for submergence conditions less than the modular limit, or for submergence rates that exceed the modular limit, use the venturi solution with approach section and throat section water levels to determine discharge.

From the field test data presented, it is apparent that the venturi solution may be used with long-throated flumes for submergence rates both less than and in excess of the modular limit. Thus it is not necessary to determine the degree of submergence. The practical impact is that only two water levels – the approach level and the throat level – are needed to measure flow at a long-throated flume under any submergence condition.

Efforts associated with the field testing have been unsuccessful in identifying an alternative to construction of stilling wells that can be isolated from the canal and linked together to simplify accurate level sensor set-up calibration and calibration checks. At present the linked, multiple stilling well configuration appears to be a key feature for practical use of the venturi solution with a long-throated flume. Accurate determination of a common datum for multiple stilling wells is essential for obtaining differential head measurements with the resolution needed for discharge measurement precision using the venturi solution.

Use of long-throated flumes equipped to accurately measure both approach and throat water levels to enable use of the venturi solution may represent a discharge measurement alternative to emerging technologies including acoustic-Doppler, radar, and others for conditions of excessive or of uncertain submergence. Long-throated flumes equipped for venturi solution measurements may, in many cases, represent enhanced cost effectiveness, enhanced accuracy, and enhanced reliability for measuring discharge under limited head availability conditions compared with existing alternatives.

## References

- Gill, T. and Einhellig, E., “Submerged Venturi Flume.” Proceedings of SCADA and Related Technologies for Irrigation District Modernization – A USCID Water Management Conference, Vancouver, WA, October 26-29, 2005.
- Replogle, J.A. and Wahlin, B., “Venturi Meter Constructions for Plastic Irrigation Pipelines.” Applied Engineering in Agriculture. Vol. 10 (No. 1). 1994.
- Robinson, A.R. and Chamberlain A.R., “Trapezoidal Flumes for Open Channel Flow Measurements.” Transactions, American Society of Agricultural Engineers, Vol. 3 (No. 2):120-124,128, 1960.
- U.S. Bureau of Reclamation, 1997, Water Measurement Manual, 3<sup>rd</sup> ed., U.S. Government Printing Office, Washington, DC 20402.
- Vermeyen, Tracy B., “A Laboratory Evaluation of Unidata’s Starflow Doppler Flowmeter and MGD Technologies’ Acoustic Doppler Flow Meter.” ASCE/EWRI Joint Conference on Water Resources Engineering and Water Resources Planning and Management, Minneapolis, MN, July 30 - August 2, 2000.
- Wahl, T.L., A.J. Clemmens, J.A. Replogle, and M.G. Bos, 2000, “Winflume— Windows-based Software for the Design and Calibration of Long-Throated Measuring Flumes.” 4th Decennial National Irrigation Symposium, Phoenix, AZ, November 14-16, 2000.