

Conservation Projects Feature

YRBWEP Workgroup Meeting
June 3, 2015




Yakama Nation Lateral 4-4146 Pipeline



Lateral 4-4146 Pipeline

- Replaced 1.25 miles of earthen canal with a PVC pipeline – serves 476 acres
- Installed reinforced concrete check structure to control canal water surface elevation and screen trash
- Installed headworks to control and measure flows
- Estimated water savings = 840 acre-feet per year

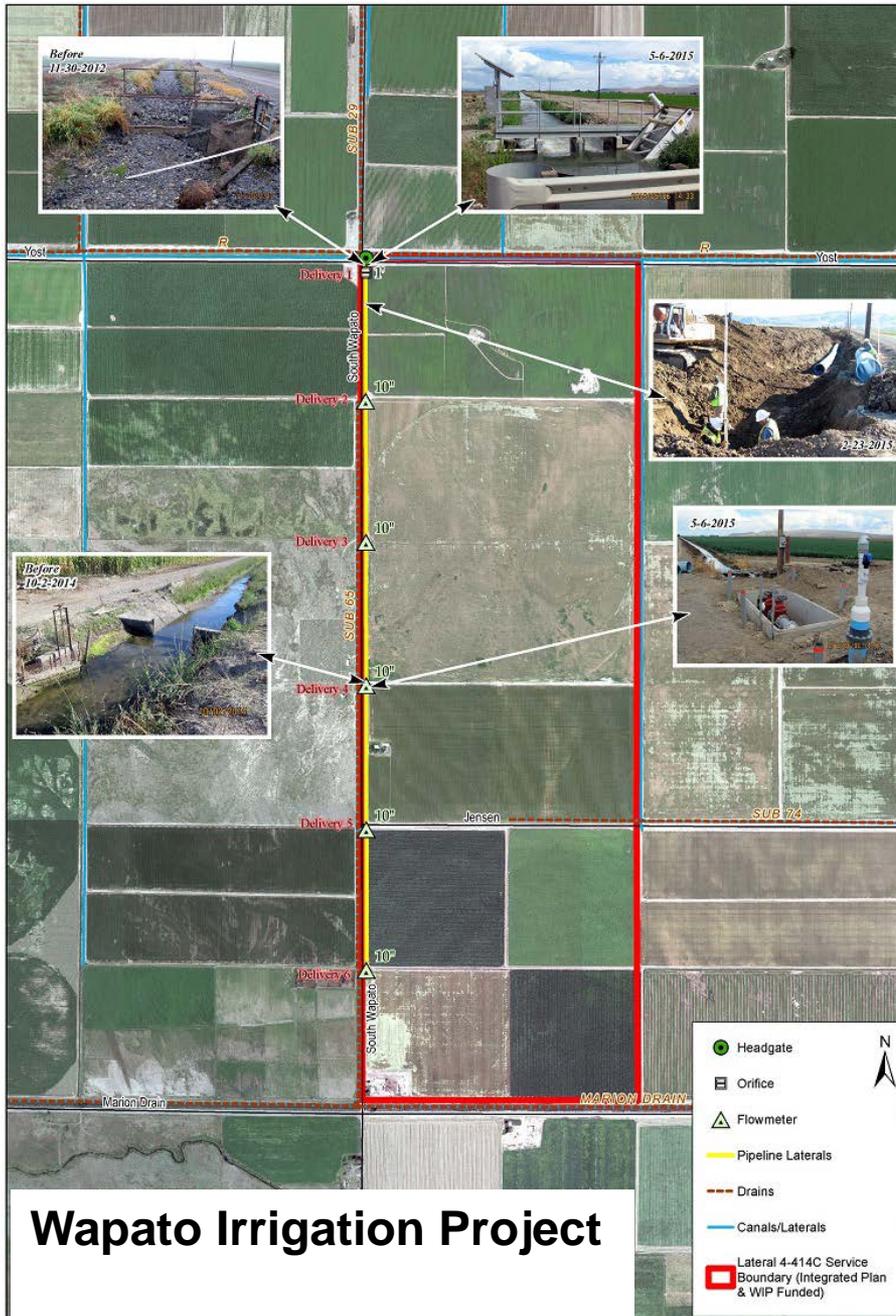

Wapato Irrigation Project

