SALTON SEA

Alternative Evaluation

Final Draft Report

September 1997

Salton Sea Authority
California State Department of Water Resources
Bureau of Reclamation

SALTON SEA AREA STUDY
ALTERNATIVE EVALUATION APPRAISAL REPORT

FINAL DRAFT

A cooperative effort among
the Salton Sea Authority,
the California Department of Water Resources,
and the Bureau of Reclamation

Prepared by
Lower Colorado Region
Bureau of Reclamation

September 1997

OUR MISSION

To manage, develop, and protect water
and related resources in an
environmentally and economically
sound manner in the interest
of the American public.

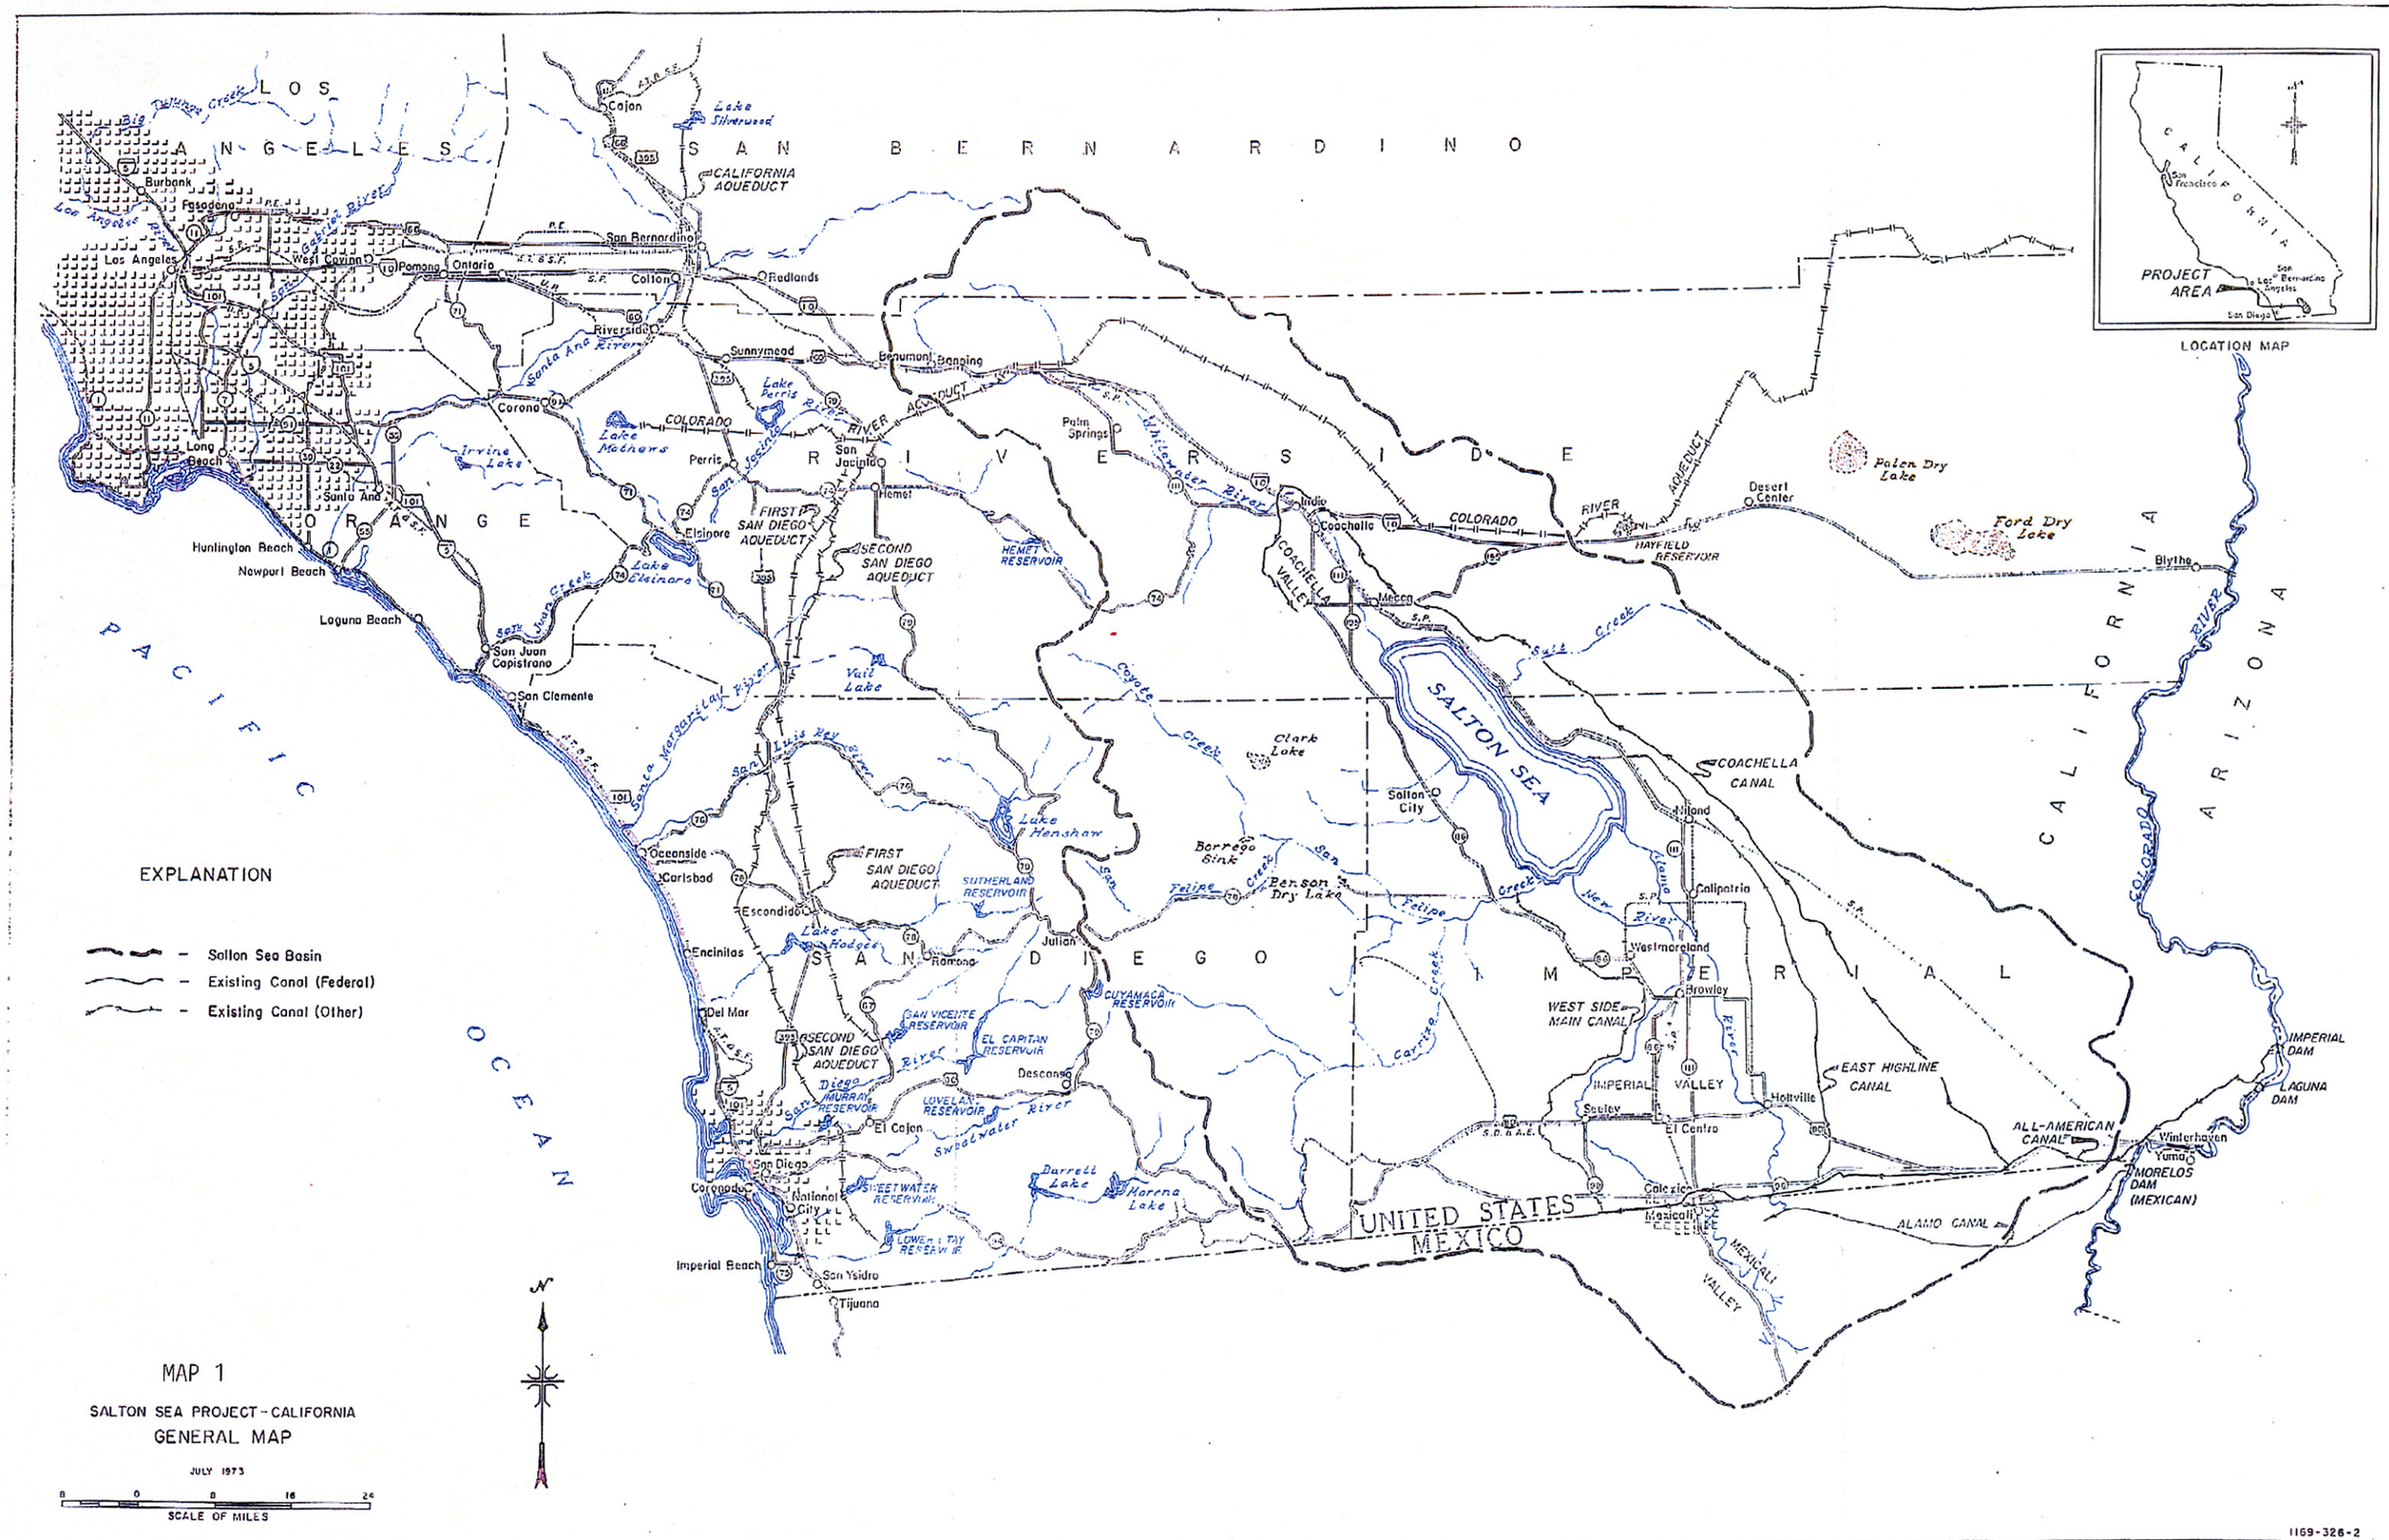
LOS ANGELES
SAN BERNARDINO
ORANGE
RIVERSIDE
SAN DIEGO
IMPERIAL
CALIFORNIA
ARIZONA
PACIFIC OCEAN
UNITED STATES
MEXICO
Big Tujunga Creek
Los Angeles River
San Gabriel Rivers
Santa Ana River
Lake Silverwood
CALIFORNIA AQUEDUCT
Cajon
San Bernardino
Redlands
Riverside
Colton
Ontario
Pomona
West Covina
Los Angeles
Burbank
Pasadena
Sunnymead
Beaumont
Banning
Corona
Lake Perris
Lake Mathews
COLORADO RIVER AQUEDUCT
Irvine Lake
Long Beach
Santa Ana
Perris
San Jacinto
Hemet
Palm Springs
Whitewater River
Indio
Coachella
COLORADO RIVER AQUEDUCT
Desert Center
Palen Dry Lake
Ford Dry Lake
Blythe
Huntington Beach
Newport Beach
Laguna Beach
Elsinore
Lake Elsinore
FIRST SAN DIEGO AQUEDUCT
SECOND SAN DIEGO AQUEDUCT
HEMET RESERVOIR
HAYFIELD RESERVOIR
COACHELLA VALLEY
Mecca
San Juan Creek
San Juan Capistrano
San Clemente
Santa Margarita River
San Luis Rey River
Vail Lake
Coyote Creek
Clark Lake
SALTON SEA
Salton City
COACHELLA CANAL
Niland
Oceanside
Carlsbad
Escondido
Lake Henshaw
FIRST SAN DIEGO AQUEDUCT
SUTHERLAND RESERVOIR
Borrego Sink
San Felipe Creek
Benson Dry Lake
Calipatria
New River
Westmorland
Julian
Encinitas
Ramona
Lake Hodges
CUYAMACA RESERVOIR
Del Mar
SECOND SAN DIEGO AQUEDUCT
SAN VICENTE RESERVOIR
EL CAPITAN RESERVOIR
Descanso
San Dieguito River
Carrizo Creek
WEST SIDE MAIN CANAL
Brawley
IMPERIAL VALLEY
EAST HIGHLINE CANAL
Holtville
Seeley
El Centro
ALL-AMERICAN CANAL
Winterhaven
Yuma
IMPERIAL DAM
LAGUNA DAM
MORELOS DAM (MEXICAN)
El Cajon
San Diego
Coronado
National City
SWEETWATER RESERVOIR
LOWER OTAY RESERVOIR
Sweetwater River
Barrett Lake
Morena Lake
Imperial Beach
San Ysidro
Tijuana
Calexico
Mexicali
ALAMO CANAL
MEXICALI VALLEY
Gulf Creek
PROJECT AREA
San Francisco
Los Angeles
San Diego
LOCATION MAP
EXPLANATION
Salton Sea Basin
Existing Canal (Federal)
Existing Canal (Other)
MAP 1
SALTON SEA PROJECT - CALIFORNIA
GENERAL MAP
JULY 1973
8 0 8 16 24
SCALE OF MILES
1169-326-2

CONTENTS

Page

General Location Map — Frontispiece

Executive Summary ..... **xiv**
Introduction xiv
Background xiv
Approach xiv
Findings xv
Conclusions xvi
..... xx

Chapter I - Introduction **1**
1.0 Project 1
1.1 Description of the Area 1
1.2 History 1
1.3 Purpose 1
1.4 Authority 4
1.5 Participants 4
1.6 Expenditures 4
1.7 Prior Studies and Other Activities 6
Prior Studies 6
Other Activities 6
Water Current Model 7
Weather Stations 7
Bathymetry 7
Dike Construction Options 8
1.8 Report Organization 8

Chapter II - Problem Definition **11**
2.0 Introduction 11
2.1 Water Quality Problems 11
Salinity 11
Organochlorine Pesticides 11
Selenium 13
Eutrophication 13
2.2 Water Level Problems 13
2.3 Economic Development Needs 14
Population Trends/Salinity 15
Salton Sea Recreation Market 15
Related Economic Activities 15
Agriculture 17
2.4 Environmental Quality Needs 18
Fluctuations 19
2.5 Social and Cultural Needs 20
Economic Opportunity 20
Community Enhancement 20

Page

Chapter III - Evaluation Process **23**
3.1 Purpose 23
3.2 Public Involvement 23
3.3 Selection Process 23
Paired Comparison Matrix (PCM) 24
Analysis Matrix 25
3.4 Elimination Criteria 26
Target Salinity: 35 to 40 ppt 26
Target Elevation Range: -230 to -235 feet msl 27
No Unproven Technology 27
Ten Million Dollar Threshold in Annual OME&R Costs 28
3.5 Evaluation Criteria 28

Chapter IV - Alternatives Retained for Further Evaluation 33
4.0 Introduction 33
4.1 Evaluation Limitations 33
4.2 General Assumptions 35
4.3 Indexing Costs 36
4.4 Alternative Description Organization 36
Diked Impoundments 38
Introduction 38
Evaluation Criteria Common to All Impoundment Alternatives 42
Agricultural Interests 42
Wildlife 42
Disposal 44
Water Quality 44
Finance Costs 45
Land and Location 45
Sport Fishery 45
Economic Development 46
Intergovernmental Cooperation 46
Time to Solution 47
Partners 47
Alternative 1 - 50 Square Miles, South End or North End 48
History 48
Proposal Description 50
O&M Costs 50
Construction Costs 54
Wildlife 54
Water Quality 54
Time to Construct 55
Alternative 2 - 40 Square Miles, South End 56
History 56
Proposal Description 56

Page

O&M Costs . . . 57
Construction Costs . . . 57
Wildlife . . . 57
Water Quality . . . 58
Time to Construct . . . 58
Alternative 3 - 127 Square Miles, North Third of Sea . . . 59
History . . . 59
Proposal Description . . . 59
O&M Costs . . . 59
Construction Costs . . . 59
Wildlife . . . 60
Elevation . . . 60
Water Quality . . . 60
Economics . . . 61
Time to Construct . . . 61
Alternative 4 - 47 Square Miles, In-Sea Evaporation Basins . . . 62
History . . . 62
Proposal Description . . . 62
O&M Costs . . . 62
Construction Costs . . . 62
Wildlife . . . 63
Water Quality . . . 63
Time to Construct . . . 63
Alternative 5 - Phased Impoundment . . . 64
History . . . 64
Proposal Description . . . 64
O&M Costs . . . 66
Construction Costs . . . 66
Salinity Control . . . 66
Wildlife . . . 67
Elevation . . . 67
Water Quality . . . 67
Time to Construct . . . 67

Chapter V - Alternatives Eliminated . . . 69
5.0 Introduction . . . 69
5.1 Elimination Summary . . . 69
Alternative 6 - 30 Square Mile with Pumping . . . 71
History . . . 71
Proposal Description . . . 71
Evaluation of Alternative . . . 71
O&M Costs . . . 72
Construction Costs . . . 72
Reason for Elimination . . . 73

Page

Alternative 7 - 30 Square Mile (Maximum Pumping) . . . 74
History . . . 74
Proposal Description . . . 74
Evaluation of Alternative . . . 74
O&M Costs . . . 75
Construction Costs . . . 75
Reason for Elimination . . . 76
Pump-Out Options . . . 77
Introduction . . . 77
Alternative 8 - Onshore Evaporation Ponds (Site Unidentified) . . . 79
History . . . 79
Proposal Description . . . 79
Evaluation of Alternative . . . 79
OME&R Costs . . . 79
Construction Costs . . . 80
Reason for Elimination . . . 80
Alternative 9 - Enhanced Evaporation/Solar Pond/Power Generation . . . 82
History . . . 82
Proposal Description . . . 82
Evaluation of Alternative . . . 85
OME&R Costs . . . 85
Construction Costs . . . 86
Reason for Elimination . . . 86
Alternative 10 - Dry Lake Bed Evaporation (Palen, Clark, or Ford Lakes) . . . 87
History . . . 87
Proposal Description . . . 87
Evaluation of Alternative . . . 87
OME&R Costs . . . 90
Construction Costs . . . 90
Reason for Elimination . . . 90
Alternative 11 - Pipeline to Pacific Ocean (Camp Pendleton Area)
(Pump-out only/pump-out and replenish) . . . 91
History . . . 91
Proposal Description . . . 91
Evaluation of Alternative . . . 91
OME&R Costs . . . 91
Construction Costs . . . 93
Reason for Elimination . . . 93
Alternative 12 - Navigable Waterway/Mexicali Support
(Pump-out and replenish) . . . 94
History . . . 94
Proposal Description . . . 94
Evaluation of Alternative . . . 94
OME&R Costs . . . 96
Construction Costs . . . 97
Reason for Elimination . . . 97

Page

Alternative 13 - 190 Square Mile Plastic Curtain - Divide Sea in Half 98
History 98
Proposal Description 98
Evaluation of Alternative 98
Reason for Elimination 101
Alternative 14 - Various Sized Impoundments Within the Sea
(Plastic Curtains) 102
History 102
Proposal Description 102
Evaluation of Alternative 104
Reason for Elimination 104
Alternative 15 - Canal/Dam System to Base of Chocolate Mountains 105
History 105
Proposal Description 105
Evaluation of Alternative 105
Reason for Elimination 105
Alternative 16 - Diked Impoundment to Gulf of California 107
History 107
Proposal Description 107
Evaluation of Alternative 107
OME&R Costs 109
Construction Costs 110
Reason for Elimination 111
Alternative 17 - Frontier Aquadyne Enhanced Evaporation 112
History 112
Proposal Description 112
Evaluation of Alternative 112
OME&R Costs 112
Construction Costs 114
Reason for Elimination 114
Alternative 18 - Environment Enhancing Technologies, Inc.
Solar Still Desalting/Colorado River Water Replenishment 115
History 115
Proposal Description 115
Evaluation of Alternative 115
Reason for Elimination 117
Alternative 19 - SNAP Technology Enhanced Evaporation Tower 118
History 118
Proposal Description 118
Evaluation of Alternative 118
Reason for Elimination 120
Alternative 20 - Aquaculture/Evaporation Ponds 121
History 121
Proposal Description 121
Evaluation of Alternative 121

Page

OME&R Costs ... 123
Construction Costs ... 123
Reason for Elimination ... 123
Alternative 21 - Pump-out to Laguna Salada/Gulf of California (pump-out only) ... 124
History ... 124
Proposal Description ... 124
Evaluation of Alternative ... 124
OME&R Costs ... 126
Construction Costs ... 126
Reason for Elimination ... 126
Alternative 22 - Pump-out to Laguna Salada/Gulf of California (pump-out and replenish) ... 128
History ... 128
Proposal Description ... 128
Evaluation of Alternative ... 128
OME&R Costs ... 130
Construction Costs ... 130
Reason for Elimination ... 130
Alternative 23 - Pumped Storage Canal to Gulf of California (pump-out and replenish) ... 131
History ... 131
Proposal Description ... 131
Evaluation of Alternative ... 131
Costs ... 133
Reason for Elimination ... 133
Alternative 24 - Heated Pump-out Solar Membrane Distillation ... 134
History ... 134
Proposal Description ... 134
Evaluation of Alternative ... 134
Reason for Elimination ... 134
Alternative 25 - Disposal of Reject Stream to Yuma ... 137
History ... 137
Proposal Description ... 137
Evaluation of Alternative ... 137
Reason for Elimination ... 137
Combination Alternatives ... 138
Introduction ... 138
Alternative 26 - Impoundment/Evaporation Pond/Pipeline-Canal to Gulf of California and/or to Yuma Desalting Plant ... 139
History ... 139
Proposal Description ... 139
Evaluation of Alternative ... 139
OME&R Costs ... 140

Page

Construction Costs . . . 140
Reason for Elimination . . . 140
Alternative 27 - Impoundment/Power Generation/Constructed Wetlands . . . 141
History . . . 141
Proposal Description . . . 141
Evaluation of Alternative . . . 141
OME&R Costs . . . 143
Construction Costs . . . 145
Reason for Elimination . . . 145
Alternative 28 - Freshwater Shoreline/Pumped Storage/Constructed Wetlands . . . 146
History . . . 146
Proposal Description . . . 146
Evaluation of Alternative . . . 146
OME&R Costs . . . 149
Construction Costs . . . 149
Reason for Elimination . . . 149
Alternative 29 - Solar Power Generation/Pumped Storage/Constructed Wetlands - Laguna Salada Salt Disposal . . . 150
History . . . 150
Proposal Description . . . 150
Evaluation of Alternative . . . 150
OME&R Costs . . . 152
Construction Costs . . . 152
Reason for Elimination . . . 152
Removal of Inflow Salt . . . 153
Introduction . . . 153
Alternative 30 - Move Yuma Desalting Plant to the Sea . . . 154
History . . . 154
Proposal Description . . . 154
Evaluation of Alternative . . . 154
OME&R Costs . . . 155
Construction Costs . . . 155
Reason for Elimination . . . 155
Alternative 31 - Poplar Tree Constructed Wetlands . . . 156
History . . . 156
Proposal Description . . . 156
Evaluation of Alternative . . . 156
Reason for Elimination . . . 158
Alternative 32 - Special Pretreatment Reservoirs . . . 159
History . . . 159
Proposal Description . . . 159
Evaluation of Alternative . . . 159
Reason for Elimination . . . 159

Page

Alternative 33 - United States Filter Corporation
(New River Desalting) ... 160
History ... 160
Proposal Description ... 160
Evaluation of Alternative ... 160
OME&R Costs ... 160
Reason for Elimination ... 161
Alternative 34 - Groundwater Pumping (Selenium Management) ... 162
History ... 162
Proposal Description ... 162
Evaluation of Alternative ... 162
Reason for Elimination ... 164
Water Imports ... 165
Introduction ... 165
Alternative 35 - Freshwater Blending (Calexico) ... 166
History ... 166
Proposal Description ... 166
Evaluation of Alternative ... 166
Reason for Elimination ... 166
Alternative 36 - Replenishment by Colorado River Surplus ... 168
History ... 168
Proposal Description ... 168
Evaluation of Alternative ... 168
Reason for Elimination ... 169
Other Options ... 170
Introduction ... 170
Alternative 37 - Venturi Air Pump ... 171
History ... 171
Proposal Description ... 171
Evaluation of Alternative ... 171
Reason for Elimination ... 173
Alternative 38 - Foraminifera Studies (Research Proposal) ... 174
History ... 174
Proposal Description ... 174
Evaluation of Alternative ... 174
Reason for Elimination ... 174
Alternative 39 - Potential Use of Study Ponds (Research Proposal) ... 175
History ... 175
Proposal Description ... 175
Evaluation of Alternative ... 175
Reason for Elimination ... 175
Alternative 40 - Injection Well Salt Disposal ... 177
History ... 177
Proposal Description ... 177
Evaluation of Alternative ... 177

Page

OME&R Costs 179
Construction Costs 179
Reason for Elimination 179
Alternative 41 - Air Diffusion/Ultraviolet Ozone System 180
History 180
Proposal Description 180
Evaluation of Alternative 180
Reason for Elimination 180
Alternative 42 - Surface Aeration 182
History 182
Proposal Description 182
Evaluation of Alternative 182
Reason for Elimination 182
Alternative 43 - Gravel Berm 184
History 184
Proposal Description 184
Evaluation of Alternative 184
Reason for Elimination 184
Alternative 44 - Sea Water Filtration 186
History 186
Proposal Description 186
Evaluation of Alternative 186
Reason for Elimination 188
Alternative 45 - Enzyme-Activated Removal 189
History 189
Proposal Description 189
Evaluation of Alternative 191
Reason for Elimination 191
Alternative 46 - Power/Freshwater Cogeneration 192
History 192
Proposal Description 192
Evaluation of Alternative 192
O&M Costs 192
Reason for Elimination 193
Alternative 47 - Water Conservation 194
History 194
Proposal Description 194
Evaluation of Alternative 194
Reason for Elimination 194
Alternative 48 - Drainage Water Reuse or Blending 195
History 195
Proposal Description 195
Evaluation of Alternative 196
Reason for Elimination 196

Page

Alternative 49 - Pulsed Plasma 197
History 197
Proposal Description 197
Evaluation of Alternative 197
Reason for Elimination 197
Alternative 50 - Hydropower/Filtration System Resort 198
History 198
Proposal Description 198
Evaluation of Alternative 198
Reason for Elimination 198
Alternative 51 - Slow Sand Reverse Osmosis Filtration 201
History 201
Proposal Description 201
Evaluation of Alternative 201
Reason for Elimination 203
Alternative 52 - Electrochemical Extraction 204
History 204
Proposal Description 204
Evaluation of Alternative 204
OME&R Costs 204
Construction Costs 206
Reason for Elimination 206
Alternative 53 - Mexican Cleanup of New River 207
History 207
Proposal Description 207
Evaluation of Alternative 208
Reason for Elimination 208
Alternative 54 - Land Speed Racetrack 209
History 209
Proposal Description 209
Evaluation of Alternative 209
Reason for Elimination 209

Chapter VI - Conclusions 211

References 215

Appendix A 223

Maps

Map 1, Location Map ..... Frontispiece
Map 2, Land Ownership Map 3

Page

Tables

Table 1, Categories of Alternatives xiv
Table 2, Evaluation Criteria and Weighted Values xvi
Table 3, Elimination Summary xvii
Table 4, Construction Costs Ratings xx
Table 5, Fiscal Year 1994 Expenditures 6
Table 6, The Salton Sea Recreation Market 16
Table 7, Evaluation Parameters 24
Table 8, Example PCM 25
Table 9, Example Analysis Matrix 26
Table 10, Evaluation Criteria 29
Table 11, Full Elimination Summary 34
Table 12, Alternative Description Organization 37
Table 13, Elimination Summary 70
Table 14, 400,000 AF to Evaporation Ponds 81
Table 15, 100,000 AF to 400,000 AF to Gulf of California 127
Table 16, Pump to Enhanced Evaporation System 144

Figures

Figure 1, Analysis Matrix xviii
Figure 2, Strength Graph of Evaluated Alternatives xix
Figure 3, Historical Salinity and Elevation Through Time 12
Figure 4, Analysis Matrix 212

Photographs

Photo 1, Salton Sea Authority Board of Directors 5
Photo 2, CIMIS Station at Salton City 7
Photo 3, Environmental Factors Contribute to High Fish Mortality Events 14

Illustrations

Illustration 1, Typical Dike Cross Section 41
Illustration 2, Typical Dike Section, Dumped Embankment 51
Illustration 3, Typical Dike Section, Dumped Embankment 52
Illustration 4, Section Through Inlet Structure 53
Illustration 5, Phased Impoundment 65
Illustration 6, The Solar Pond Power Plant 83
Illustration 7, Enhanced Evaporation/Solar Pond/Power Generation 84
Illustration 8, Project Area 88
Illustration 9, Pump-out Dry Lake Bed Evaporation 89
Illustration 10, Pump-out Pipeline to Pacific Ocean 92
Illustration 11, Conceptual Pipeline 95
Illustration 12, Plastic Curtain 99
Illustration 13, Diked Impoundment, One-Half of the Sea 100
Illustration 14, Diked Impoundment, Construction of Lake(s) Within the Sea 103
Illustration 15, Pump-out to Base of Chocolate Mountains 106

Page

Illustration 16, Pump-out Solar Pond/Diked Impoundment 108
Illustration 17, Cascade 9 Series 113
Illustration 18, Desalination Chamber 116
Illustration 19, Aeroelectric Power System Surrounded by Dew Irrigated Area 119
Illustration 20, Conceptual Salton Sea Fish Farm 122
Illustration 21, Pump-out to Gulf of California 125
Illustration 22, Pump-out and Replenish 129
Illustration 23, Pumped Storage/Gulf Salt Disposal 132
Illustration 24, Membrane Distillation 135
Illustration 25, SHMD Piping and Instrumentation 136
Illustration 26, Diked Areas/Solar Power Generation/Constructed Wetlands 142
Illustration 27, Freshwater Shoreline/Pumped Storage 147
Illustration 28, Joint USA/Mexico Solar Power Generation/Pumped Storage 151
Illustration 29, Conceptual Diagram, Poplar Wetlands for Wastewater Recycling 157
Illustration 30, Groundwater Pumping for Selenium Management 163
Illustration 31, Pump Non-River Water at Calexico to Combine With Salton Sea Water 167
Illustration 32, Venturi Chamber 172
Illustration 33, Study Ponds 176
Illustration 34, Disposal of Salts With Injection Wells 178
Illustration 35, What Bottom Oxygenation Does 181
Illustration 36, Surface Aeration 183
Illustration 37, Typical Dike Section, Dumped Embankment 185
Illustration 38, Typical Cluster 187
Illustration 39, Thorneco Enzyme-Activated Cellulose Technology 190
Illustration 40, Hydropower/Filtration System Resort 199
Illustration 41, Slow Sand Filtration 202
Illustration 42, Metal Ion Extraction 205